



Accessories

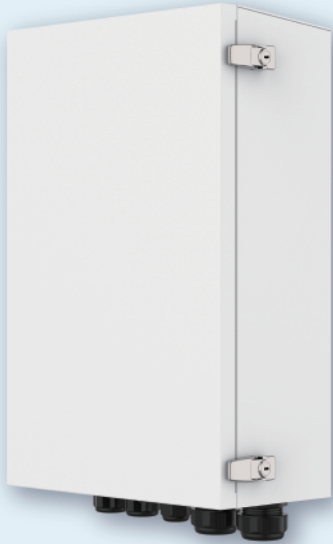

X1-Matebox G2

We get rid of complicated wiring work by laying all the wires in the Matebox. All you need to do is just to connect all the cables which are already well-sorted in the Matebox. This helps to save time and money.

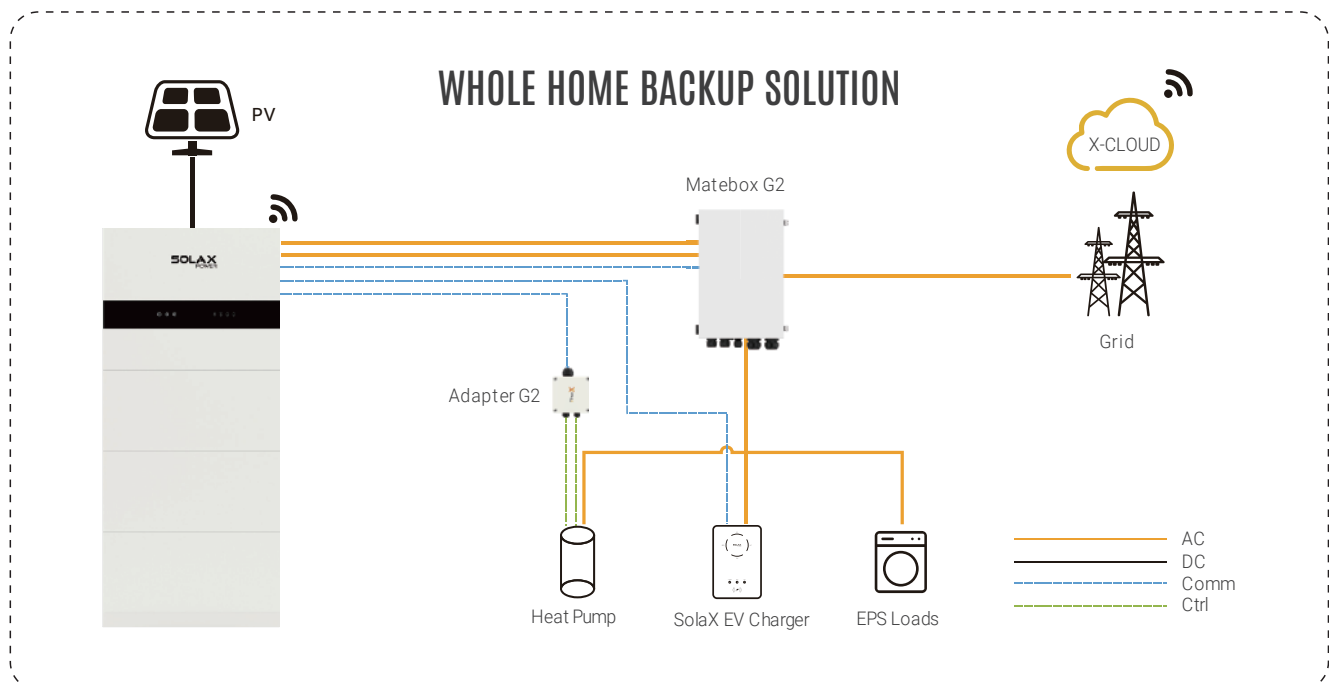

X1-Matebox G2

ON-GRID (INVERTER)	
Rated voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. apparent on-grid input / output power	8000 VA
Max. on-grid current	36.4 A
OFF-GRID (INVERTER)	
Rated voltage, frequency	230 Vac, 50 / 60 Hz
Max. power	8000 VA
Rated current	36.4 A
GRID (UTILITY)	
Rated grid voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. input current	63 A (100 A for England)
LOAD	
Rated voltage, frequency	220 / 230 / 240 Vac, 50 / 60 Hz
Max. current	63 A (100 A for England)
ENVIRONMENT LIMIT	
Degree of protection	IP65
Protection class	Class I
Operating temperature range	-25 ~ 60°C (Derating above +45°C)
Storage temperature	-40 ~ 70°C
Relative humidity	0 ~ 100% RH (condensing)
Altitude	< 3000 m
Overvoltage category	III (AC)
OTHER	
Cooling concept	Natural cooling
DIMENSION AND WEIGHT	
Dimensions	549 × 360 × 192 mm
Net weight	11 kg